

PCT400 Industrial Temperature Transmitter




Platinum temperature sensor

Vibration resistance, good reliability, high accuracy


Temperature range	
Temperature range	-50°C to 250°C
Specification	
Accuracy (linearity, repeatability and hysteresis)	±0.5%F.S. (Typical)
Excitation	24V
Output	4-20mA, 4-20mA+HART
Heat response time	≤30S
Sensing element	PT100
Insertion diameter	Φ8mm (others please specify)
Insulation	100MΩ/250VDC
Protection	IP65

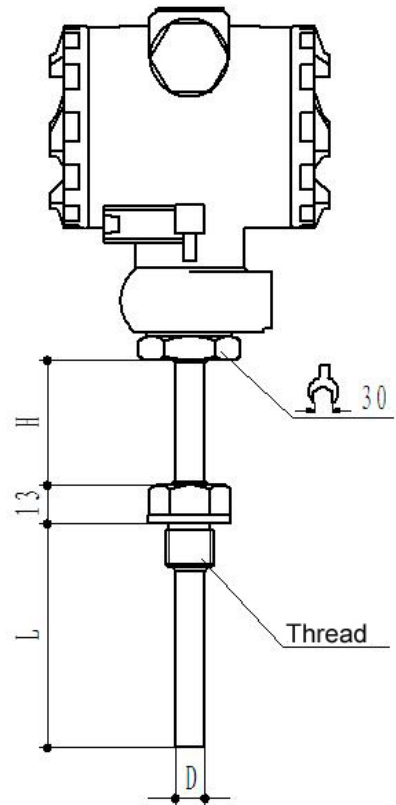

Current output

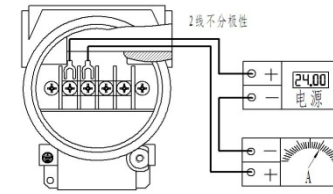

Voltage output

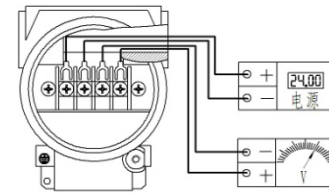

PCT400 XX-XX-XX-XX-XX

Temperature range

Please write directly

Temperature connection

C1:M20*1.5

C2:M16*1

C3: M27*2

Electrical connection

J1:2088

J2: 2088 with display

Output signal

B1: 4-20mA

B2: 4-20mA+HART

Insertion length

L30: 30mm

L50: 50mm

L75: 75mm

L100: 100mm